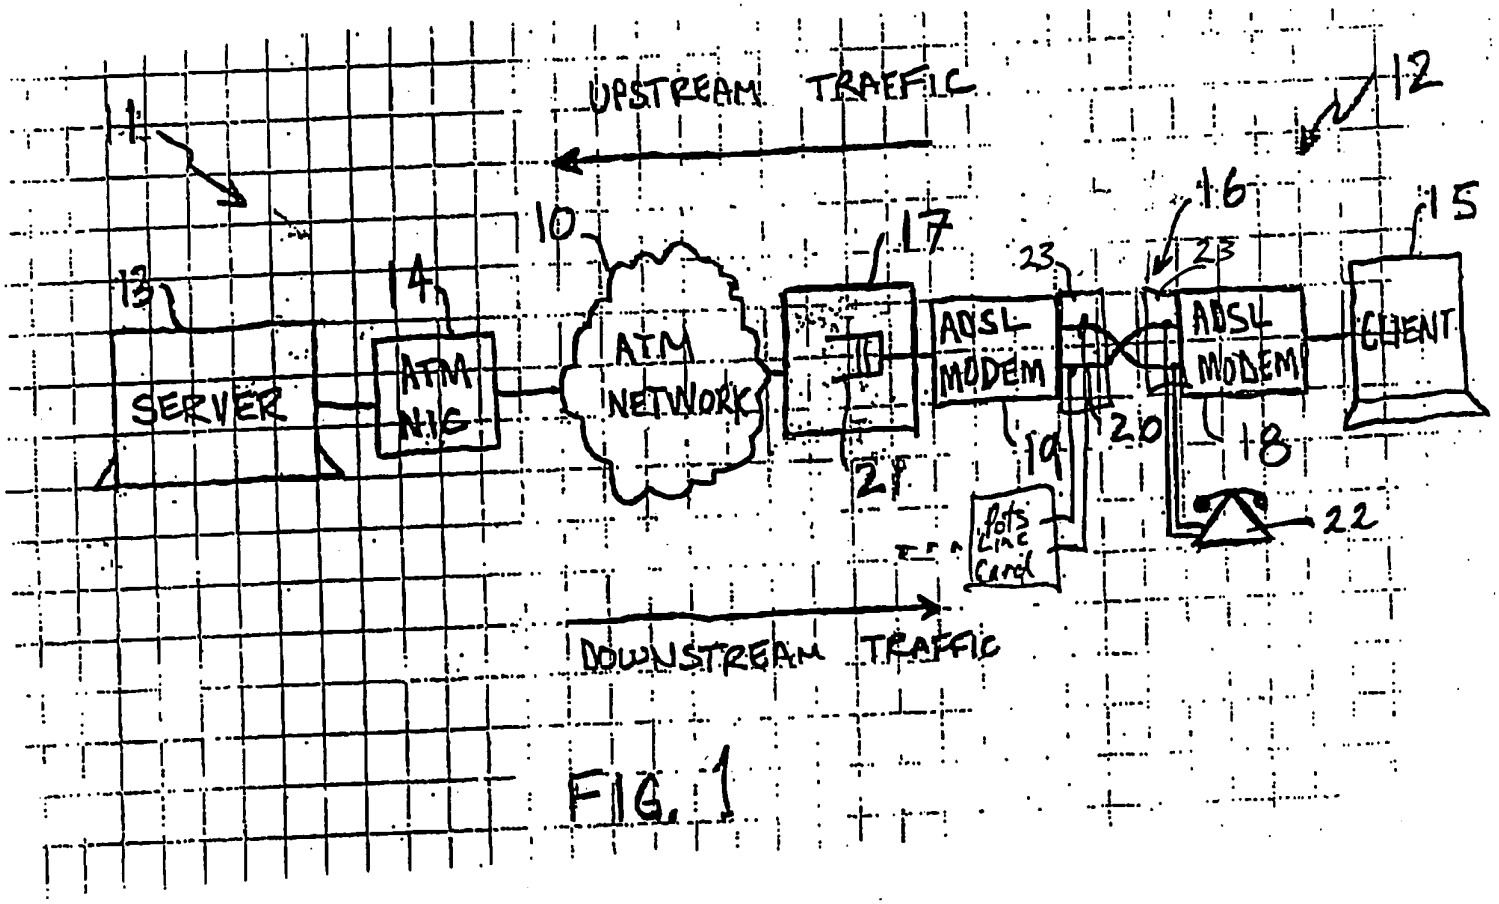

FIG. 1

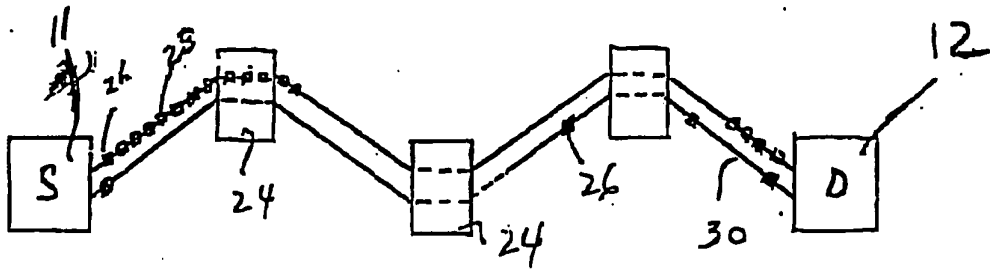

FIGURE 2

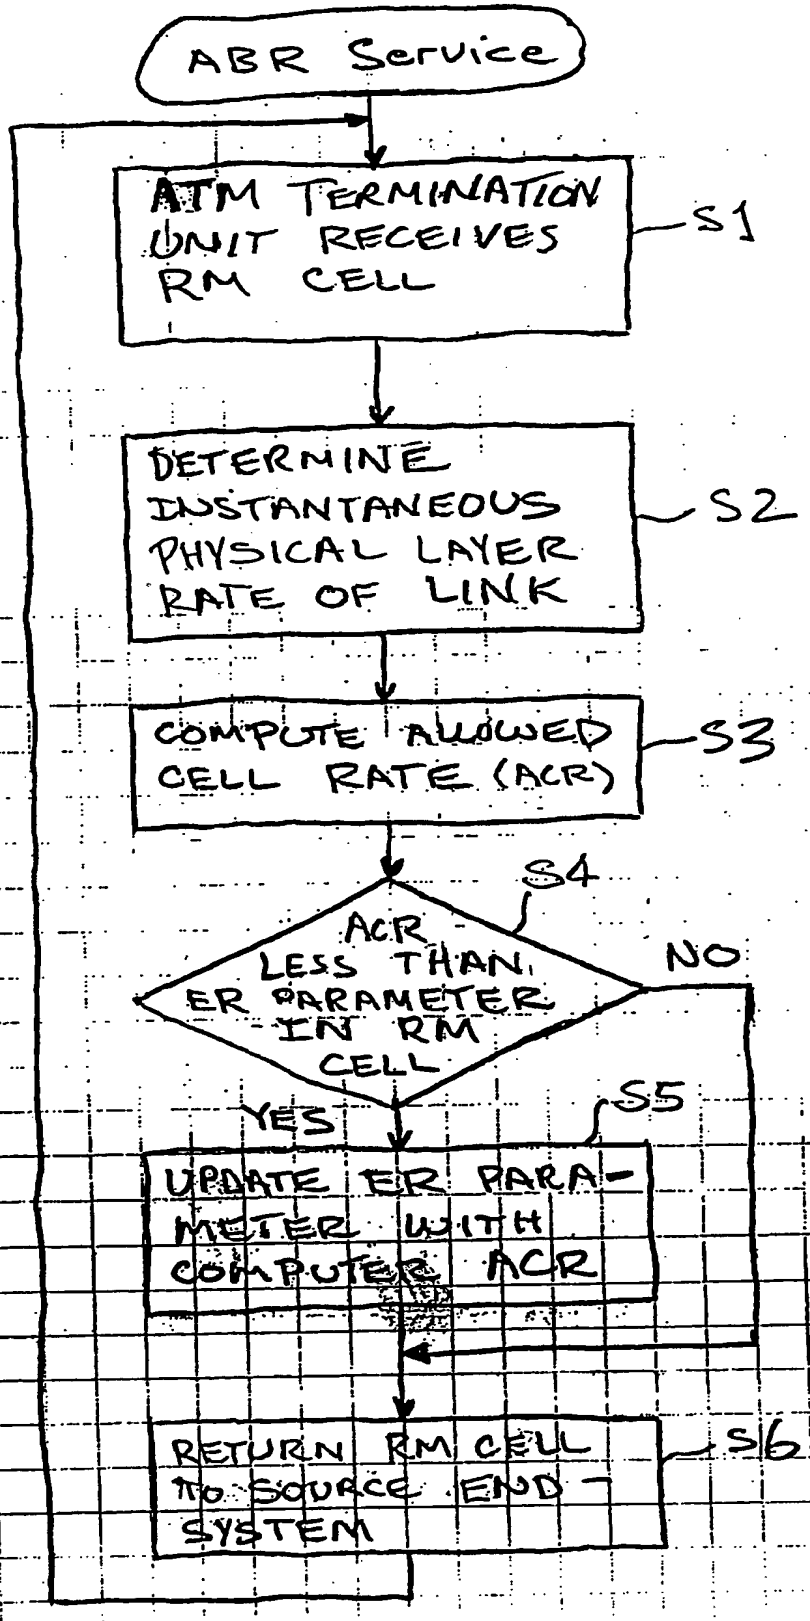
ABR Service
ATM TERMINATION UNIT RECEIVES RM CELL
S1
DETERMINE INSTANTANEOUS PHYSICAL LAYER RATE OF LINK
S2
COMPUTE ALLOWED CELL RATE (ACR)
S3
S4
ACR LESS THAN ER PARAMETER IN RM CELL
NO
YES
S5
UPDATE ER PARAMETER WITH COMPUTED ACR
RETURN RM CELL TO SOURCE END SYSTEM
S6

FIG. 3A

08050903-1T2505

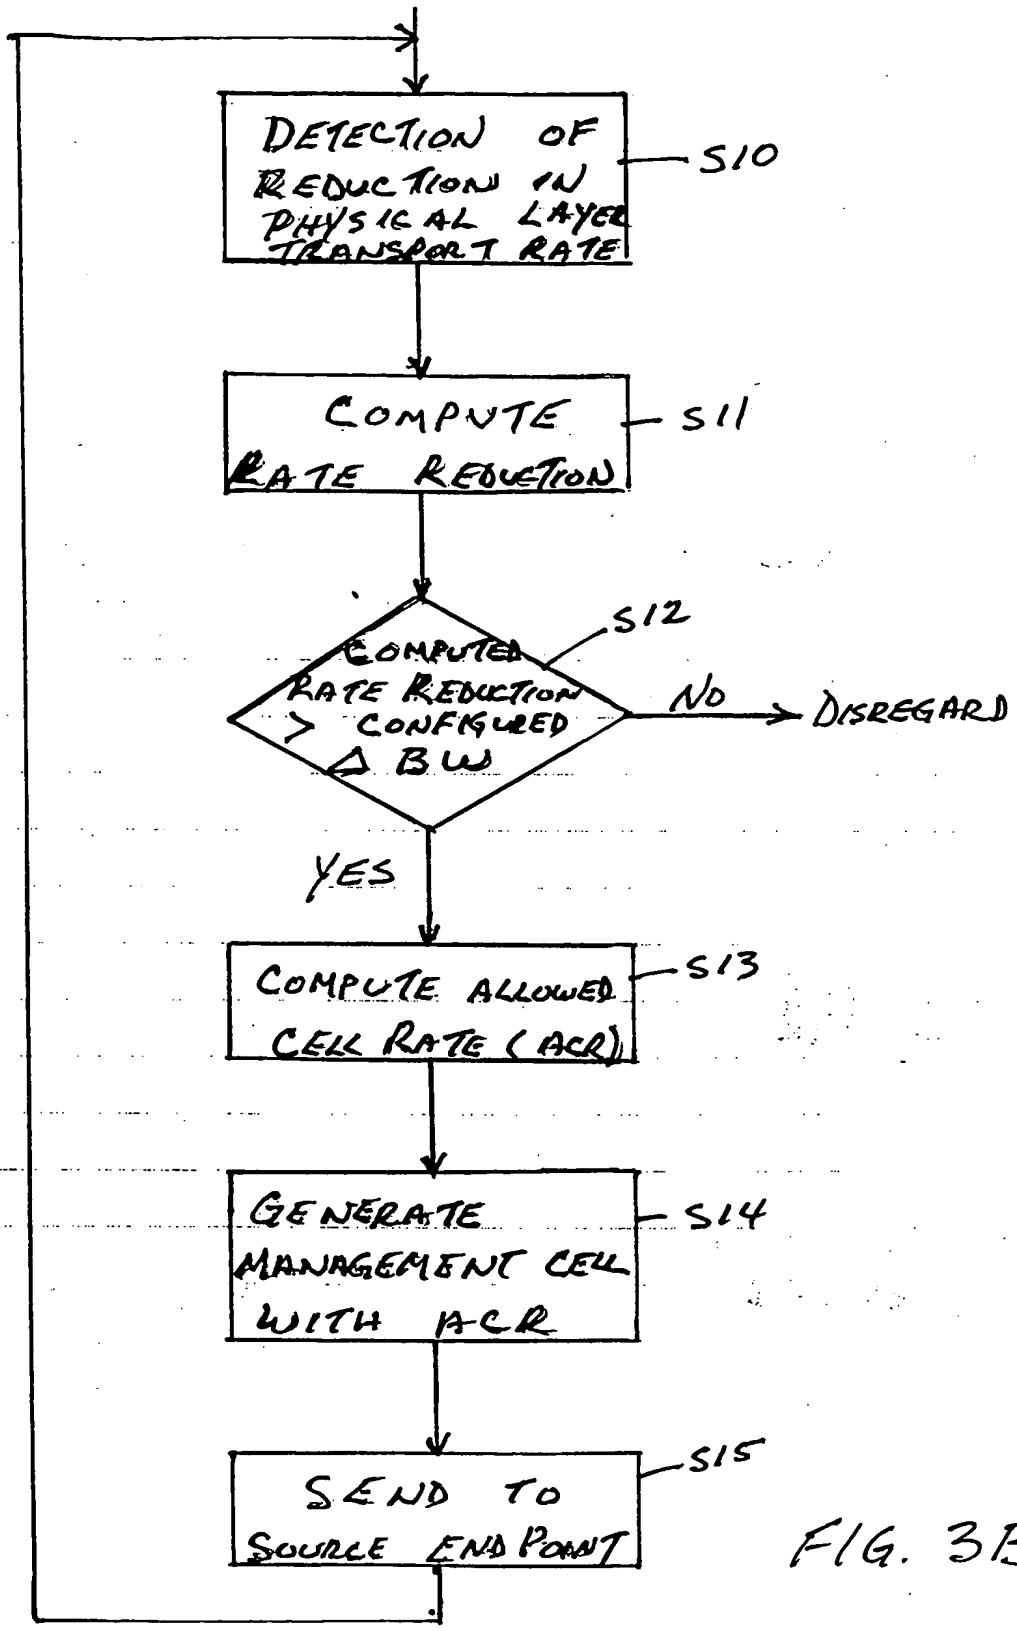

FIG. 3B

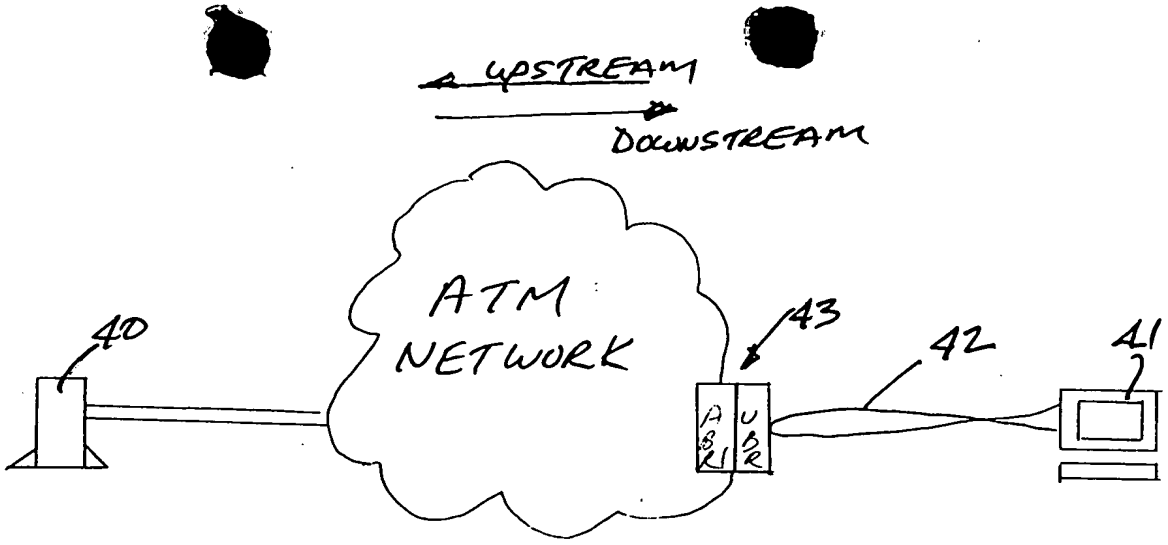

FIGURE 4

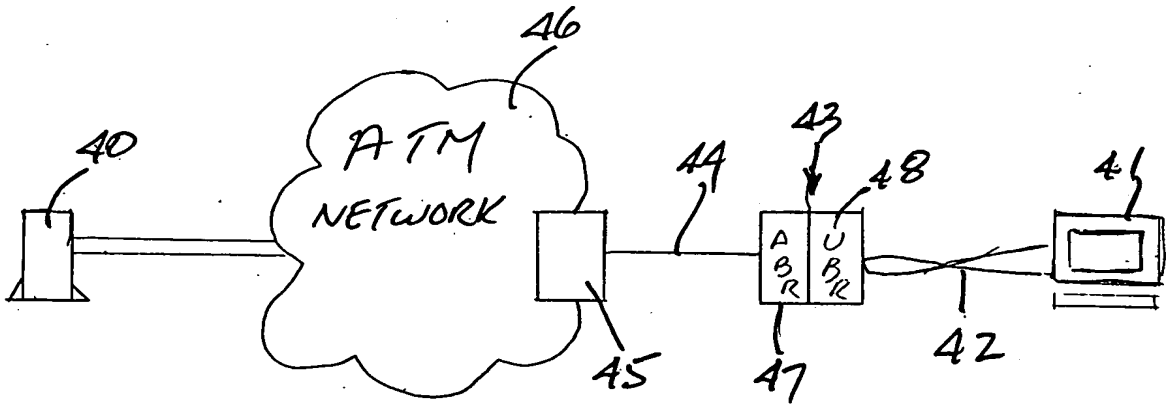

FIGURE 5

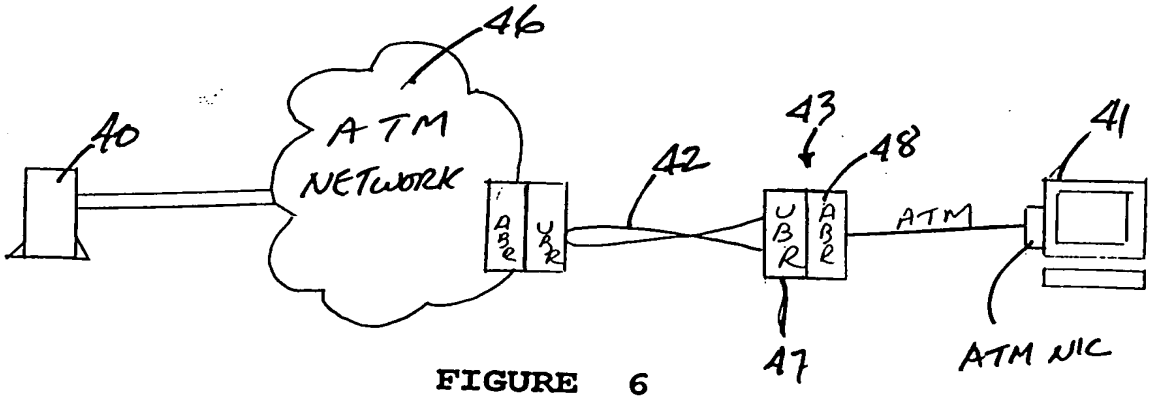

FIGURE 6

09541256.060502

FIGURE 7

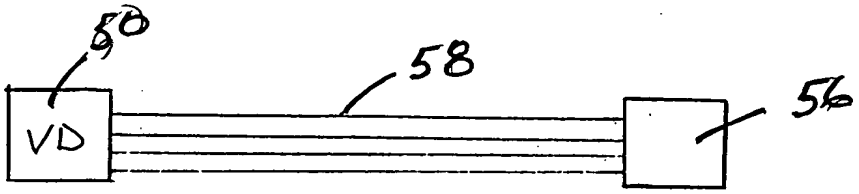

FIGURE 8

Document: 3050-4